



PILKINGTON

Pilkington

Suncool[®]-R Green 45/25 Pro T

ENG


Pilkington Suncool[®]-R Green 45/25 Pro T

Standart	Light		Solar Radiant Heat			U _g -value	
	Transmittance LT, %	Reflectance out LRout, %	Direct energy transmittance DET, %	Solar Factor SF, %	Shading coefficient SC	Air -filled W/m ² K	Argon -filled W/m ² K
EN	44	34	26	28	0,32	1.3	1.0

All values are calculated for the central* area of the IG unit 6| - 16 Ar - 4 according to EN 410 and EN 673 climatic conditions.

Standart	Light			Solar Radiant Heat			U _g -value	
	Transmittance LT, %	Reflectance out LRout, %	Light reflectance inside, LRin, %	Direct energy transmittance DET, %	Solar Heat Gain Coefficient SHGC	Shading coefficient, SC	Air -filled Summer day W/m ² K	Argon -filled Winter night W/m ² K
NFRC	44	37	33	23	27	0,31	1.27	1.38

All values are calculated* of the IG unit 6| - 16 - 6 according to NFRC 100-2010 climatic conditions using production data base with Window 6.3

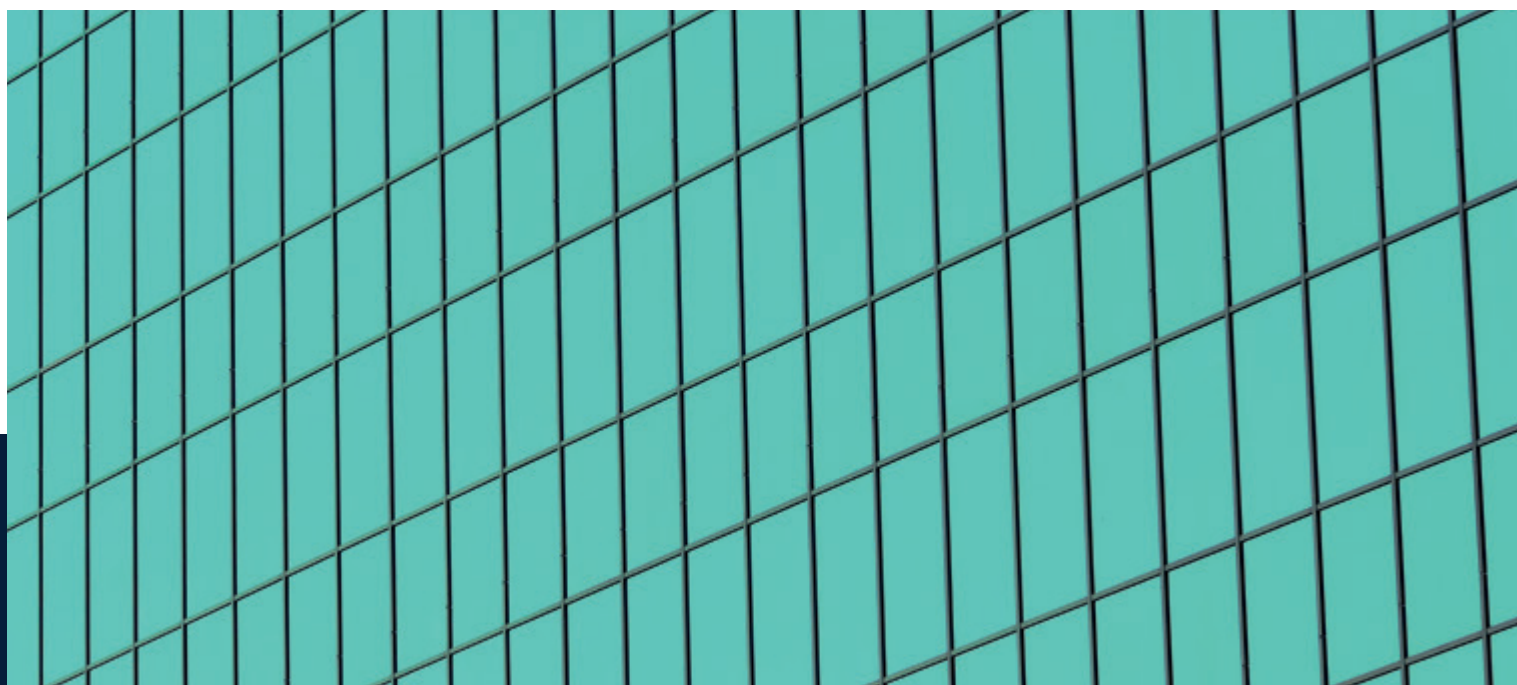

Pilkington Suncool[®]-R Green 45/25 Pro T has a highly reflective exterior with shiny green tint. Due to the unique magnetron coating technology it lets in neutral light inside the building without colour distortions. It fits best facades which should both provide a lot of illumination inside the building and have a high external reflection.

*Ask Pilkington representatives for Pilkington Suncool[®] / Optitherm[®] glass processing manual or download it from www.firstinglass.ru



LLC «Pilkington Glass»

1 Stekolnaya Str, Zhukovo
Village, Ramensky District,
Moscow Region, Russia, 140125

www.firstinglass.ru

tel.: +7 (495) 369-95-00
fax: +7 (495) 369-95-01
e-mail: info@firstinglass.ru